

EL, ELT CRANK TYPE LONG JAW STROKE HOLLOW POWER CHUCKS


中空超長行程 油壓夾頭

新產品
NEW

專利產品
Patent Protected



尺寸圖 » Dimensions

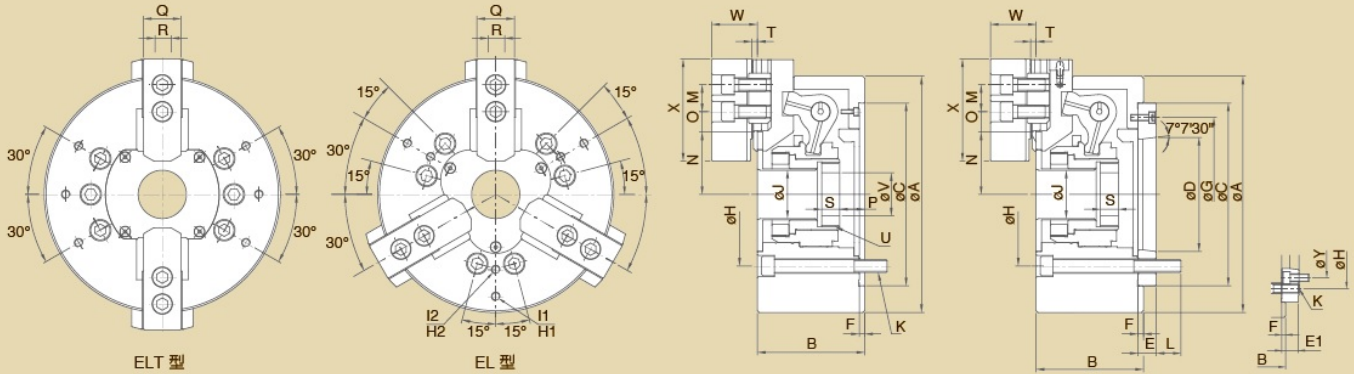

規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	主軸鼻端番號 Nose Of Spindle	A	B	C	D	E	E1	F	G	H	I1	H1
EL-06	Az-5	178	87	140	82.563	15	--	5	116	104.8	6-M10x1.5P	PCDø145
EL-08	Az-6(Az-5)	220	100	170	106.375	17	23	5	150	133.4	3-M8x1.25P	PCDø190
EL-10	Az-8(Az-6)											
ELT-06	Az-5	178	87	140	82.563	15	--	5	116	104.8	6-M10x1.5P	PCDø145
ELT-08	Az-6(Az-5)	220	100	170	106.375	17	23	5	150	133.4	6-M8x1.25P	PCDø180
ELT-10	Az-8(Az-6)											

型式/規格 MODEL /SPEC.	I2	H2	J	K	L	M	N max.	N min.	O max.	O min.	P max.
EL-06	--	--	34	6-M10x1.5P	15	20	47.58	35.49	26.05	12.55	13.95
EL-08	3-M8x1.25P	PCDø140	45	6-M12x1.75P	18.85	25	58	41.96	31.05	14.55	18.45
EL-10											
ELT-06	--	--	34	6-M10x1.5P	15	20	47.58	35.49	26.05	12.55	13.95
ELT-08	--	--	45	6-M12x1.75P	18.85	25	58	41.96	31.05	14.55	18.45
ELT-10											

型式/規格 MODEL /SPEC.	P min.	Q	R	S	T	U	V	W	X	Y	通孔直徑 Thru-Hole [Diameter] (mm)	柱塞行程 Plunger Stroke (mm)
EL-06	-1.05	31	12	15	5	M55x2P	20	40.6	73	--	34	15
EL-08	-1.51	35	14	16.5	5	M60x2P	30	42.5	95	104.8	45	20
EL-10												
ELT-06	-1.05	31	12	15	5	M55x2P	20	40.6	73	--	34	15
ELT-08	-1.51	35	14	16.5	5	M60x2P	30	42.5	95	104.8	45	20
ELT-10												

型式/規格 MODEL /SPEC.	爪行程〔直徑〕 Jaw Stroke [Diameter] (mm)	最高迴轉速 Max.Speed r.p.m.(min ⁻¹)	最大拉力 Max. Pull Force kgf (KN)	最大靜夾持力 Max. Gripping Force kgf (KN)	最大設定油壓壓力 Max. Hydr. Pressure kgf/cm ² (Mpa)	搭配 油壓缸型號 Matching Cylinder	夾持範圍 Gripping Range
EL-06	24	3600	2140 (21)	2667 (26)	28 (2.7)	P1246	ø25~ø178
EL-08	32	2400	3360 (33)	3850 (37.7)	26 (2.5)	P1552	ø30~ø220
EL-10						P1875	
ELT-06	24	3600	1420 (14)	1769 (17)	28 (2.7)	P1246	ø25~ø178
ELT-08	32	2400	2240 (22)	2650 (26)	18 (1.8)	P1552	ø30~ø220
ELT-10						P1875	