

CL-DP 3-JAW SOLID CHUCK WITH ANTI-CHIPS SEALED


三爪中實油壓夾頭

防塵專利結構可以防止鐵屑進入本體內部。
Dustproof patent structure can prevent the metal chips get into chuck inside.

新產品
NEW



尺寸圖 » Dimensions

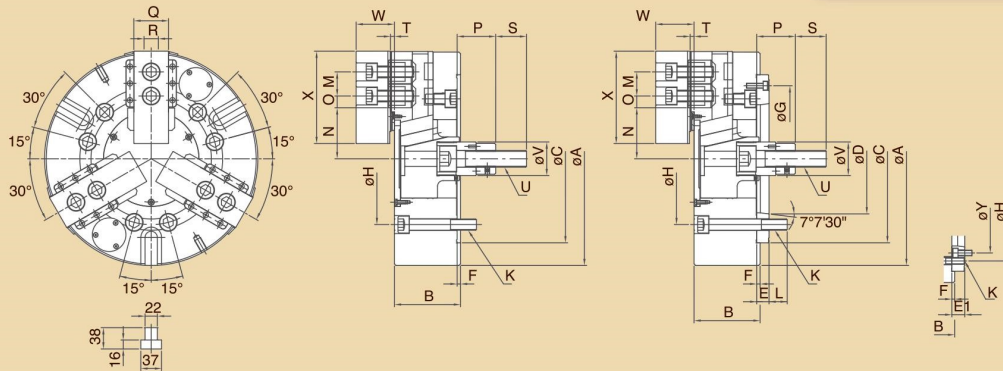

規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	主軸鼻端番號 Nose Of Spindle	A	B	C (h6)	D	E	E1	F	G	H	K	L	M
CL-12DP	A ₂ -8	304	110	220	139.719	18	--	6	190	171.4	6-M16x2P	20	30
CL-15DP	A ₂ -11	381	118	300	196.869	22	--	6	260	235	6-M20x2.5P	32	43
CL-18DP	A ₂ -11	450	118	300	196.869	22	--	6	260	235	6-M20x2.5P	32	43
CL-21DP	A ₂ -15(A ₂ -11)	530	129	380	285.775	27	41	6	330.2	330.2	6-M24x3P	33	60
CL-24DP	A ₂ -15(A ₂ -11)	610	129	380	285.775	27	41	6	330.2	330.2	6-M24x3P	33	60
CL-32DP	A ₂ -15(A ₂ -11)	800	129	380	285.775	27	41	6	330.2	330.2	6-M24x3P	33	60
CL-40DP	A ₂ -15(A ₂ -11)	1000	129	380	285.775	27	41	6	330.2	330.2	6-M24x3P	33	60

型式/規格 MODEL /SPEC.	N max.	N min.	O max.	O min.	P max.	P min.	Q	R	S	T	U	V	W	X	Y
CL-12DP	60.63	55.32	48.55	20.05	163	133	50	18	36	5	M20x2.5P	50	54	129	-
CL-15DP	69.05	60.97	58.05	40.05	104	69	62	25.5	55	7	M30x3.5P	60	68	165	---
CL-18DP	99.46	91.38	58.05	40.05	92	57	62	25.5	55	7	M30x3.5P	60	68	165	--
CL-21DP	80.49	72.41	101.8	41.8	96.95	61.95	65	25	55	7	M30x3.5P	60	75.5	180	235
CL-24DP	119.49	111.41	101.8	41.8	96.95	61.95	65	25	55	7	M30x3.5P	60	75.5	180	235
CL-32DP	119.49	111.39	197.8	41.8	97	61.95	65	25	55	7	M30x3.5P	60	75.5	180	235
CL-40DP	119.49	111.39	299.8	41.8	97	62	65	25	55	7	M30x3.5P	60	75.5	180	235

型式/規格 MODEL /SPEC.	柱塞行程 Plunger Stroke (mm)	爪行程 (直徑) Jaw Stroke [Diameter] (mm)	最高迴轉速 Max.Speed r.p.m.(min ⁻¹)	最大拉力 Max. Pull Force kgf (kN)	最大靜夾持力 Max. Gripping Force kgf (kN)	最大設定 油壓壓力 Max. Hydr. Pressure kgf/cm ² (MPa)	淨重 Weight (kg)	搭配 油壓缸型號 Matching Cylinder	夾持範圍 Gripping Range
CL-12DP	30	10.5	3200	4080 (40)	15500 (152)	29 (2.8)	64.4	L1530(L1530RE)	φ18~φ304
CL-15DP	35	16	3000	8260 (81)	25290 (248)	32 (3.1)	104.1	L2035(L2035RE)	φ68~φ381
CL-18DP	35	16	2700	8260 (81)	25290 (248)	32 (3.1)	138.5	L2035(L2035RE)	φ100~φ450
CL-21DP	35	16	1900	8650 (85)	27000 (265)	33 (3.2)	204.8	L2035(L2035RE)	φ80~φ530
CL-24DP	35	16	1700	8650 (85)	27000 (265)	33 (3.2)	260	L2035(L2035RE)	φ155~φ610
CL-32DP	35	16	1100	8650 (85)	27000 (265)	33 (3.2)	455.4	L2035(L2035RE)	φ155~φ800
CL-40DP	35	16	800	8650 (85)	27000 (265)	33 (3.2)	--	L2035(L2035RE)	φ155~φ1000