


OPT 2-JAW HIGH SPEED HOLLOW POWER CHUCKS

二爪高速中空油壓夾頭



尺寸圖 » Dimensions

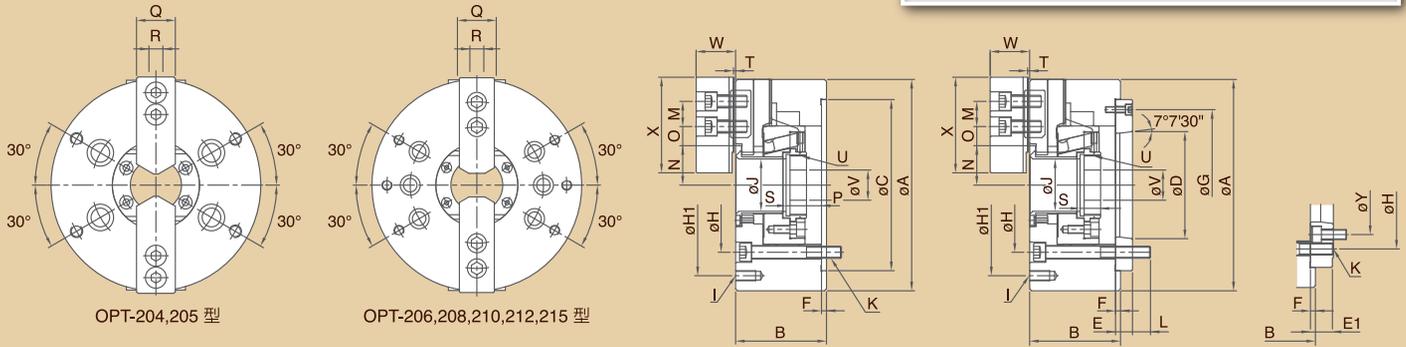

規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL / SPEC.	主軸鼻端番號 Nose Of Spindle		A	B	C (H6)	D	E	E1	F	G	H	H1	I	J	K	L		
	OPT-204	--	--	110	59	85	--	--	--	4	--	70.6	--	--	26	4-M10x1.5P	--	
OPT-205	A2-4		135	60	110	63.513	20	--	4	96	82.6	PCD ϕ 118	4-M8x1.25P	33	4-M10x1.5P	15		
OPT-206	A2-5		169	81	140	82.563	15	--	5	116	104.8	PCD ϕ 145	6-M10x1.5P	45	6-M10x1.5P	16		
OPT-208	A2-6(A2-5)		210	91	170	106.375	17	23	5	150	133.4	PCD ϕ 180	6-M10x1.5P	52	6-M12x1.75P	18		
OPT-210	A2-8(A2-6)		254	100	220	139.719	18	28	5	190	171.4	PCD ϕ 225	6-M12x1.75P	75	6-M16x2P	23		
OPT-212	A2-8		304	110	220	139.719	18	--	6	190	171.4	PCD ϕ 250	6-M12x1.75P	91	6-M16x2P	25		
OPT-215	A2-11(A2-8)		381	133	300	196.869	22	33	6	260	235	PCD ϕ 324	6-M12x1.75P	117.5	6-M20x2.5P	28		
型式/規格 MODEL / SPEC.	M	N max.	N min.	O max.	O min.	P max.	P min.	Q	R	S	T	U	V	W	X	Y	通孔直徑 Thru-Hole [Diameter] (mm)	柱塞行程 Plunger Stroke (mm)
	OPT-204	14	23	20.3	11.5	6.7	-6.5	23	10	17.5	2	M32x1.5P	12	24	49.5	--	26	10
OPT-205	14	26.2	23.5	19	6	1	-9	25	10	20	2	M40x1.5P	12	31.5	62	--	33	10
OPT-206	20	32.35	29.6	24	7	11	-1	31	12	19	2	M55x2P	20	37.5	73	--	45	12
OPT-208	25	39.1	35.4	30	11.6	14.5	-1.5	35	14	20.5	2	M60x2P	30	39.5	95	104.8	52	16
OPT-210	30	51.5	47.1	34	12	8.5	-10.5	40	16	25	2	M85x2P	40	43	110	133.4	75	19
OPT-212	30	61.6	56.3	46	12	8	-15	50	21	28	2	M100x2P	45	51	129	--	91	23
OPT-215	43	82.3	77	43	16	7.5	-16	62	22	42.5	5	M130x2P	48	66.5	165	171.4	117.5	23
型式/規格 MODEL / SPEC.	爪行程 [直徑] Jaw Stroke [Diameter] (mm)		最高迴轉速 Max.Speed r.p.m.(min ⁻¹)		最大拉力 Max. Pull Force kgf (kN)		最大靜夾持力 Max. Gripping Force kgf (kN)		最大設定 油壓壓力 Max. Hydr. Pressure kgf/cm ² (MPa)		夾持範圍 Gripping Range		搭配 油壓缸型號 Matching Cylinder		淨重 Weight (kg)			
OPT-204	5.4		8000		920 (9)		1930 (19)		15.5 (1.5)		ϕ 7~ ϕ 110		P0928		3.6			
OPT-205	5.4		7000		1120 (11)		2340 (23)		19 (1.9)		ϕ 10~ ϕ 135		P1036		6.5			
OPT-206	5.5		6000		1420 (14)		3770 (37)		18.5 (1.8)		ϕ 13~ ϕ 169		P1246		13.1			
OPT-208	7.4		5000		2240 (22)		5710 (56)		17 (1.7)		ϕ 13~ ϕ 210		P1552		23.0			
OPT-210	8.8		4200		2850 (28)		7440 (73)		18 (1.8)		ϕ 30~ ϕ 254		P1875		35.9			
OPT-212	10.6		3300		3670 (36)		9690 (95)		18 (1.8)		ϕ 35~ ϕ 304		P2091		56.6			
OPT-215	10.6		2500		4790 (47)		12130 (119)		17 (1.7)		ϕ 35~ ϕ 381		P2511		103.2			